



FP175

STRONG WITH WIDE OPENING

FP175 is the flagship of the FP-series with 830tons force and 12" crimping diameter. It is suitable for wide range of applications requiring large capacity in force and diameter. FP175 with extra long master dies provides long forming with single stroke especially in tube and pipe applications.

TECHNICAL DATA

Max crimping dia (mm) ¹⁾	320
Max crimping dia (inch) ¹⁾	12.60
Max. crimping force (kN)	8300
Max. crimping force (tonnage)	830
Cycle time 10 mm (s) ²⁾	3.2
Hose size ID (inch)	10 *
Die set series	32 ³⁾ / 160 ³⁾ / 170
Max. opening (mm) ⁴⁾	+155
Max. opening without dies (mm)	475
Master die D/L (mm)	320/220
Master die D/L (inch)	12.60/8.66
Motor Power (kW/HP)	11/15
Oil tank volume	250 l

DIMENSIONS (LxWxH)

Machine (mm)	1200x936x2220
Hydraulic Unit (mm)	1195x705x1411
Machine (inch)	47.3x36.9x81.9
Hydraulic Unit (inch)	47.0x27.8x44.9


WEIGHT (KG/LBS)

Machine	4455/9801
Hydraulic Unit	305/671

* ACCORDING TO THE FITTING.



Die sets can be installed into the master dies with a QuickChange-tool one set at a time.

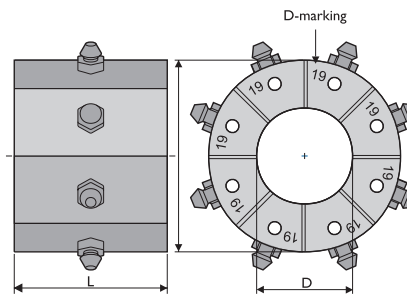

- 1) With standard dies. Crimping range can be increased with special dies.
- 2) Theoretical with 10 mm cycle.
- 3) With adapter dies
- 4) Maximum opening is the total die travel. Add this value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.



CONTROL

ICC (7" touchscreen)

STANDARD FEATURES

- Foot pedal
- Adapter dies for FP160-series
- Pressure crimping ICC1
- Step crimping ICC2

OPTIONS

- Smart die rack
 - QuickChange-tool for 32-series dies
 - Remote control unit
 - Quality control ICC3
 - Graphical quality control ICC4
 - Interface pack ETH (Communication TCP/IP & UDP)
 - Bar Code Reader BCR
 - Speed adjustment **
 - Auto greasing G3
 - Oil cooler
 - Oil Condition Monitor OCM
 - Industry 4.0
 - Pinning support mandrel
 - Camera (requires 7" display)
 - Horizontal Back layout HB
 - Horizontal Side layout HS
- ** Will have impact on motor size, hydraulic unit dimensions and weight.

DIE SET 170-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
405060/205	205	220	205.0-220.0
405060/220	220	220	220.0-235.0
405060/235	235	220	235.0-250.0
405060/250	250	220	250.0-270.0
405060/270	270	220	270.0-290.0
405060/290	290	220	290.0-320.0

DIE SET 160-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
18852/84	84	116	84.0-92.0
18852/92	92	116	92.0-100.0
18852/100	100	116	100.0-108.0
18852/108	108	116	108.0-116.0
18852/116	116	116	116.0-126.0
18852/126	126	116	126.0-136.0
18852/136	136	116	136.0-146.0
18852/146	146	116	146.0-156.0
18852/156	156	116	156.0-166.0
18852/166	166	116	166.0-178.0
18852/178	178	116	178.0-190.0
18852/190	190	116	190.0-202.0

DIE SET 32-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
18506/10	10	55	10.0-12.0
18506/12	12	55	12.0-14.0
18506/14	14	55	14.0-16.0
18506/16	16	55	16.0-19.0
18506/19	19	55	19.0-22.0
18506/22	22	70	22.0-26.0
18506/26	26	70	26.0-30.0
18506/30	30	70	30.0-34.0
18506/34	34	75	34.0-39.0
18506/39	39	75	39.0-45.0
18506/45	45	90	45.0-51.0
18506/51	51	90	51.0-57.0
18506/57	57	100	57.0-63.0
18506/63	63	110	63.0-69.0
18506/69	69	110	69.0-75.0
18506/74	74	110	74.0-80.0
18506/78	78	110	78.0-87.0

In addition to the standard die sets, a wide range of special die sets is available on request.

FURTHER INFO ON PRODUCTS,
PLEASE REVERT TO SPECIFIC PRODUCT CARD