



P20CS SCC

CS-models have been designed for service van use. CS machines are battery powered with 12V or 24V crimping head on left as standard.

New Smart Crimping Control (SCC) brings smartness and connectivity for service and workshop machines. It is easy to use with features such as diameter crimping, recipes and data recording. A magnetic attachments makes it easy to change the place of control.

TECHNICAL DATA

Max crimping dia (mm) ¹⁾	61
Max crimping dia (inch) ¹⁾	2.40
Max. crimping force (kN)	1370
Max. crimping force (tonnage)	137
Cycle time 10 mm (s) ²⁾	13.9
Hose size ID (inch)	1 ½ *
Die set series	20
Max. opening (mm)	+25
Max. opening without dies (mm)	109
Master die D/L (mm)	84/80
Master die D/L (inch)	3.31/3.15
Motor Power (kW) ³⁾	1.6/2.2
Motor Power (HP) ³⁾	2.1/3.0
Oil tank volume	5 l


DIMENSIONS (LxWxH)

(mm)	592x515x558
(inch)	23.3x20.3x22.0

WEIGHT (KG/LBS)

81/178

* ACCORDING TO THE FITTING.

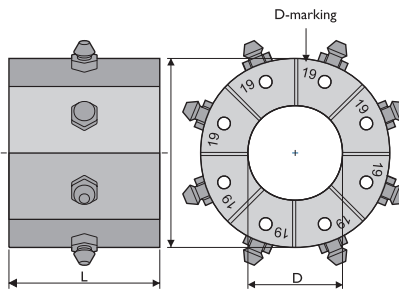

- 1) With standard dies. Crimping range can be increased with special dies.
- 2) Theoretical with 10 mm cycle.
- 3) 12V / 24V. Overload controlled

CONTROL

SCC (5" touchscreen)

MODELS

Standard CS SCC left

OPTIONS

QuickChange-tool
 Mechanical back stop device
 Electrical back stop device
 Foot pedal



DIE SET 20-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
18013/10	10	55	10.0-12.0
18013/12	12	55	12.0-14.0
18013/14	14	55	14.0-16.0
18013/16	16	55	16.0-19.0
18013/19	19	55	19.0-23.0
18013/23	23	55	23.0-27.0
18013/27	27	70	27.0-31.0
18013/31	31	70	31.0-36.0
18013/36	36	75	36.0-41.0
18013/41	41	75	41.0-47.0
18013/47	47	85	47.0-54.0
18013/54	54	85	54.0-61.0

In addition to the standard die sets, a wide range of special die sets is available on request.

FURTHER INFO ON PRODUCTS,
PLEASE REVERT TO SPECIFIC PRODUCT CARD

FINNPOWER.FI

LILLBACKAUSA.COM