



P32CS SCC

CS-models have been designed for service van use. CS machines are battery powered with 12V or 24V, crimping head on left as standard.

New Smart Crimping Control (SCC) brings smartness and connectivity for service and workshop machines. It is easy to use with features such as diameter crimping, recipes and data recording. A magnetic attachment makes it easy to change the place of control.

TECHNICAL DATA


Max crimping dia (mm) ¹⁾	87
Max crimping dia (inch) ¹⁾	3.42
Max. crimping force (kN)	2000
Max. crimping force (tonnage)	200
Cycle time 10 mm ²⁾	21.1
Hose size ID (inch)	2 *
Die set series	32
Max. opening (mm) ³⁾	+33
Max. opening without dies (mm)	132
Master die D/L (mm)	99/80
Master die D/L (inch)	3.90/3.15
Motor Power (kW) ³⁾	1.6/2.2
Motor Power (HP) ³⁾	2.1/3.0
Oil tank volume	5 l

DIMENSIONS (LxWxH)

(mm)	601x457x558
(inch)	23.7x18.0x22.0

WEIGHT (KG/LBS)

130/287

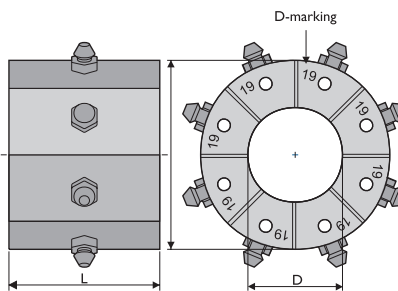

- 1) With standard dies. Crimping range can be increased with special dies.
- 2) Theoretical with 10 mm cycle.
- 3) 12V / 24V. Overload controlled

* ACCORDING TO THE FITTING.

CONTROL

SCC (5" touchscreen)

MODELS

Standard CS SCC left

OPTIONS

QuickChange-tool
Mechanical back stop device
Electrical back stop device
Foot pedal



DIE SET 32-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
18506/10	10	55	10.0-12.0
18506/12	12	55	12.0-14.0
18506/14	14	55	14.0-16.0
18506/16	16	55	16.0-19.0
18506/19	19	55	19.0-22.0
18506/22	22	70	22.0-26.0
18506/26	26	70	26.0-30.0
18506/30	30	70	30.0-34.0
18506/34	34	75	34.0-39.0
18506/39	39	75	39.0-45.0
18506/45	45	90	45.0-51.0
18506/51	51	90	51.0-57.0
18506/57	57	100	57.0-63.0
18506/63	63	110	63.0-69.0
18506/69	69	110	69.0-75.0
18506/74	74	110	74.0-80.0
18506/78	78	110	78.0-87.0

In addition to the standard die sets, a wide range of special die sets is available on request.

FURTHER INFO ON PRODUCTS,
PLEASE REVERT TO SPECIFIC PRODUCT CARD

FINNPOWER.FI

LILLBACKAUSA.COM